



CAPACITY	kg	DIVISION	(g)	NET WEIGHT	(kg)	CODE
6		e=0.1		4		BIL2B6
15		e=0.2		4		BIL2B15
30		e=0.5		4		BIL2B30

### DESCRIPTION

- Stainless steel loading plate.
- RS232 output for connection to PC or external printer.
- Remote platform input (connector included).
- 3x 6-digit backlit LCD display (20 mm height).
- 20-key waterproof keyboard.
- Bubble level and adjustable feet.
- 6 V rechargeable internal battery, 4 Ah capacity.
- Operating time: 70 hours.
- Power supply included.

### MAIN FUNCTIONS

- Piece counting with simultaneous display of: number of pieces, average unit weight, total weight of the pieces on the scale.
- 100 storable items (PLU) with the following parameters: name, preset tare value, average unit weight.
- Remote piece counting: the sampling of the pieces is performed on the scale whereas the counting of the large quantities on the remote platform.
- Automatic/manual totalization of the weighings.
- Weight indication as a percentage.
- Weight/pieces/percentage checking (HIGH/LOW) with acoustic and visual alarm.
- Auto power-off.
- Receipt printing via STAVT II external printer: customizable header, date, time, item name, scale ID, scale type, net weight, average unit weight, number of pieces on the scale, total weight, total number of pieces.

### CERTIFICATIONS

#### CERTIFICATIONS ON REQUEST

#### CODE




Calibration report - ACCREDIA LAT traceability

TARATURA50

# BIL2B

## COUNTING SCALE WITH REMOTE PLATFORM INPUT

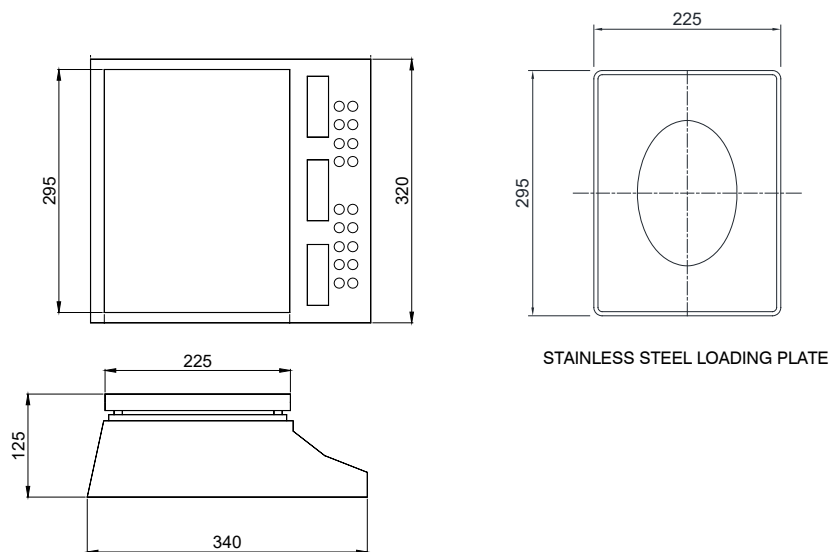


### DIMENSIONS (mm)



### TECHNICAL FEATURES

Power supply	230 VAC $\pm 10\%$
Internal battery	6 V, 4 Ah capacity
Linearity	$< 0.01\%$ full scale
Display resolution	60000
Units of measure	g, kg
Serial port	RS232
Remote platform input	5-pin circular connector (included)
Baud rate	600, 1200, 2400, 4800, 9600 (bit/s)
Humidity (condensate free)	$< 85\%$
Storage temperature	$-10\text{ }^{\circ}\text{C}$ $+50\text{ }^{\circ}\text{C}$
Working temperature	$0\text{ }^{\circ}\text{C}$ $+40\text{ }^{\circ}\text{C}$

### OPTIONS ON REQUEST

	DESCRIPTION	CODE
	Stainless steel deep tray. Dimensions: 230x300x40 mm.	PIATTOBAC
	Panasonic rechargeable battery mod. LC-R064R5P - 6 V, 4.5 Ah capacity.	BATTERIA6V4AH
	Desktop thermal printer.	STAVTII

*The Company reserves the right to make changes to the technical data, drawings and images without notice.*